




GENUINE DANFORTH® DEEPSET® II® MARINE ANCHORS

HIGH HOLDING POWER

PATENTED DEEPSET® II ANCHORS HAVE BEEN DEVELOPED THROUGH A COMBINATION OF EXHAUSTIVE FIELD TESTING, COMPUTER ENHANCED DESIGN, AND STATE-OF-THE-ART LASER MANUFACTURING TECHNIQUES. DEEPSET II ANCHORS CONTINUE THE DANFORTH TRADITION OF INNOVATION AND PERFORMANCE. PRECISION MANUFACTURING TECHNIQUES ALLOW EACH ANCHOR TO SET THE FIRST TIME, EVERY TIME. MANUFACTURED FROM PREMIUM METAL, THE DEEPSET II'S SUPERIOR SHANK HAS A TENSILE STRENGTH OF OVER 200,000 PSI.

BACKED BY A LIMITED
LIFETIME WARRANTY.

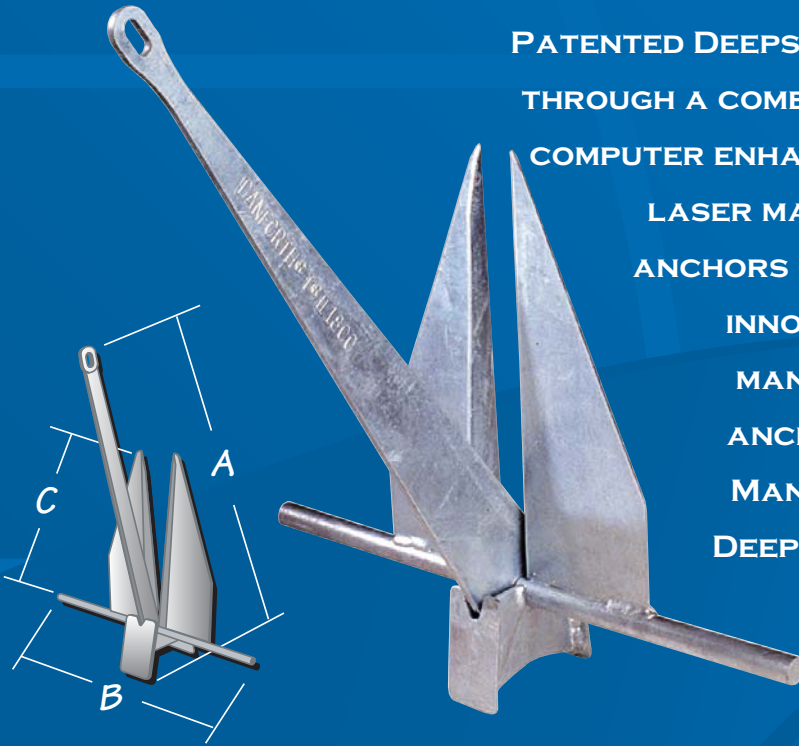

Part Number	Model	Holding Power (lbs)	Weight (lbs)	Boats Up To: (20K Winds)	Chain Dia.	A Anchor Height	B Stock Length	C Fluke Length
94027	T®II-570	570	5	26 FT.	4' -1/4"	19-3/4"	14-1/2"	10-1/2"
94028	T®II-1200	1200	8.5	35 FT.	4' -1/4"	24-1/4"	18"	12"
94029	T®II-1800	1800	13	42 FT.	5' -7/16"	28-1/4"	21"	14-1/4"
94030	T®II-2500	2500	20	50 FT.	5' -7/16"	32-1/2"	24"	16-1/4"
94031	T®II-3000	3000	25	55 FT.	6' -7/16"	35-3/4"	25"	19"
94032	T®II-4000	4000	36	65 FT.	8' -1/12"	42-1/2"	31"	22"
94033	T®II-6000	6000	75	75 FT.	8' -5/8"	50-1/2"	38"	26-1/4"
94034	T®II-7000	7000	103	80 FT.	8' -3/4"	54-3/4"	42-1/2"	28-1/4"

* Tested under equivalent conditions and average bottom conditions

TIE DOWN ENGINEERING • 5901 Wheaton Drive • Atlanta GA, 30336
www.tiedown.com • (404) 344-0000 • FAX (404) 349-0401



© Registered Trademark of TIE DOWN ENGINEERING, Inc. Atlanta, Georgia 30336 www.danforthanchors.com

050902.512